

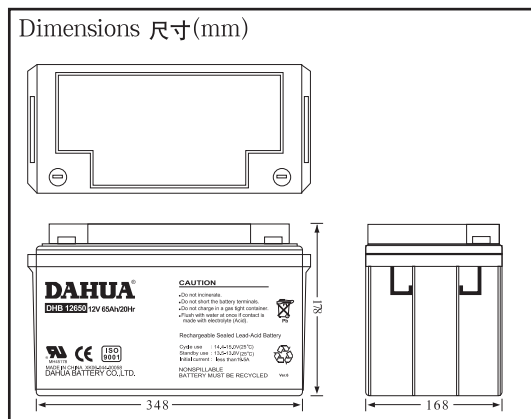


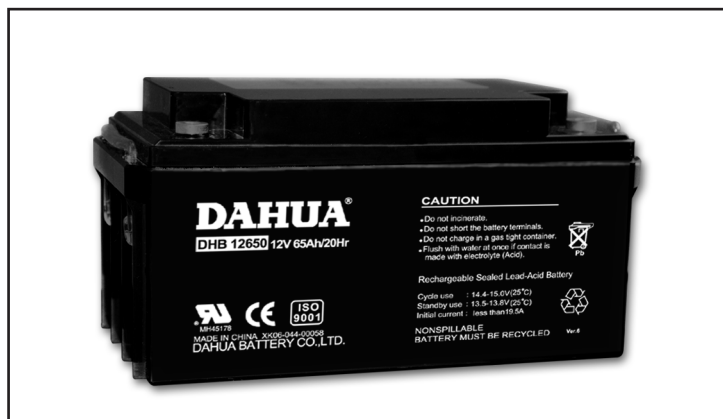

Specifications 规格

Nominal Voltage 额定电压	12V
Rated Capacity(20 hour rate) 20小时率额定容量	65AH
尺寸 Dimensions ±1mm	Length 348mm(13.70") Width 168mm(6.61") Height 178mm(7.01") Total Height (with terminals) 含端子
Weight 重量	Approx. 23kg (50.6lbs)
Standard Terminal 标准端子	B2
Optional Terminal 可选择端子	A3

放电特性 Discharge Characteristics(20°C, 68°F)

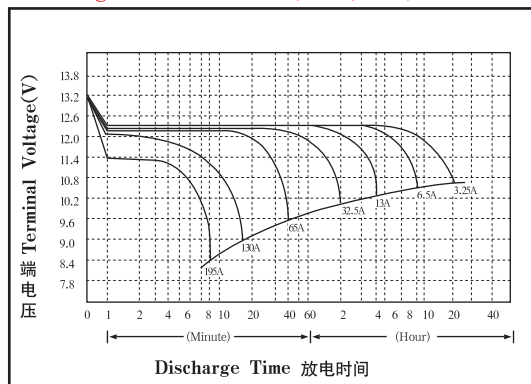

Electrical Specifications 电性能

容量 Capacity 77°F(25°C)	20 hour rate (3.2A) 20小时率 10 hour rate (6.05A) 10小时率 5 hour rate (11.06A) 5小时率 1 hour rate (37.1A) 1小时率	65AH 60.5AH 55.3AH 37.1AH
Internal Resistance 内阻	Fully charged battery 充足电 77°F(25°C)	6.5mΩ
Capacity 温度 Affected by 对容量 Temperature 影响	104°F(40°C) 77°F(25°C) 32°F(0°C) (20 hour rate) 20小时率	102% 100% 85% 65%
自放电 Self-Discharge 77°F(25°C)	Capacity after 3 month storage Capacity after 6 month storage Capacity after 12 month storage	92% 83% 65%
Charge 充电 Constant (恒压) Voltage	循环使用: 首次充电电流低于19.5A 电压: 14.4-15.0V 77°F(25°C) 浮充使用: 电压13.5-13.8V 77°F(25°C) Cycle: Initial Charging Current less than 19.5A Voltage 14.4-15.0V 77°F(25°C) Standby: Voltage 13.5-13.8V 77°F(25°C)	

放电特性 Discharge Characteristics(0°C/32°F, 40°C/104°F)

