


Specifications 规格

Nominal Voltage 额定电压	12V	
Rated Capacity(20 hour rate) 20小时率额定容量	75AH	
尺寸 Dimensions ±1mm	Length 长	259mm(10.20")
	Width 宽	168mm(6.61")
	Height 高	211mm(8.31")
	Total Height (with terminals) 总高含端子	234mm(9.21")
Weight 重量	Approx. 26kg (57.2lbs)	
Standard Terminal 标准端子	A4	
Optional Terminal 可选择端子	B2	

放电特性 Discharge Characteristics(20°C, 68°F)

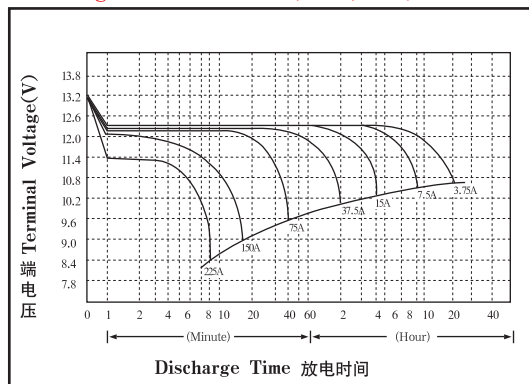

Electrical Specifications 电性能

容量 Capacity 77°F(25°C)	20 hour rate (3.75A) 20小时率	75AH
	10 hour rate (7.0A) 10小时率	70AH
	5 hour rate (12.8A) 5小时率	64AH
	1 hour rate (45A) 1小时率	45AH
Internal Resistance 内阻	Fully charged battery 充足电 77°F(25°C)	10m Ω
Capacity 温度	104°F(40°C)	102%
Affected by 对容量	77°F(25°C)	100%
Temperature 影响	32°F(0°C)	85%
(20 hour rate) 20小时率	5°F(-15°C)	65%
自放电 Self-Discharge 77°F(25°C)	Capacity after 3 month storage	92%
	Capacity after 6 month storage	83%
	Capacity after 12 month storage	65%
Charge Constant (恒压) Voltage	循环使用: 首次充电电流低于22.5A 电压: 14.4-15.0V77°F(25°C) 浮充使用: 电压13.5-13.8V77°F(25°C) Cycle: Initial Charging Current less than 22.5A Voltage 14.4-15.0V77°F(25°C) Standby: Voltage 13.5-13.8V77°F(25°C)	

放电特性 Discharge Characteristics(0°C/32°F, 40°C/104°F)

